


SHOWING EXPANSION JOINT

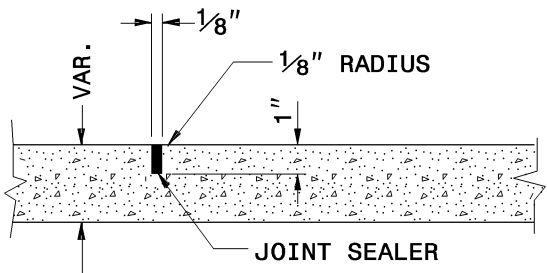

SHOWING GROOVED JOINT

**PARTIAL LONGITUDINAL SECTIONS
OF PAVED ISLANDS**

NOTE:

WHEN MONOLITHIC CONCRETE ISLAND IS ON TOP OF SURFACE COURSE, DRIVE 40d SPIKES INTO SURFACE UNDER MONOLITHIC CONCRETE ISLAND. STAGGER SPIKES ON 2' CENTERS EACH WAY.


IN THE CONCRETE PAVEMENT (ISLAND) AND CONCRETE ISLAND (MONOLITHIC) PLACE 1/2" EXPANSION JOINTS AT 30' INTERVALS AND GROOVED JOINTS 1" DEEP AT 10' INTERVALS BETWEEN EXPANSION JOINTS.

LINE UP THE JOINTS IN THE CONCRETE PAVEMENT (ISLAND) WITH THE JOINTS IN THE CURB OR CURB AND GUTTER.


FILL AND SEAL THE TOP 1/2" OF THE EXPANSION JOINTS AND THE ENTIRE DEPTH OF GROOVED JOINTS WITH JOINT SEALER.

FOR JOINTS IN THE CURB AND/OR CURB AND GUTTER, SEE STANDARD NO. 846.01


SEE TYPICAL SECTIONS FOR PAVEMENT DEPTH. KEY IN ON THE LAST LAYER OF PAVEMENT SURFACE COURSE

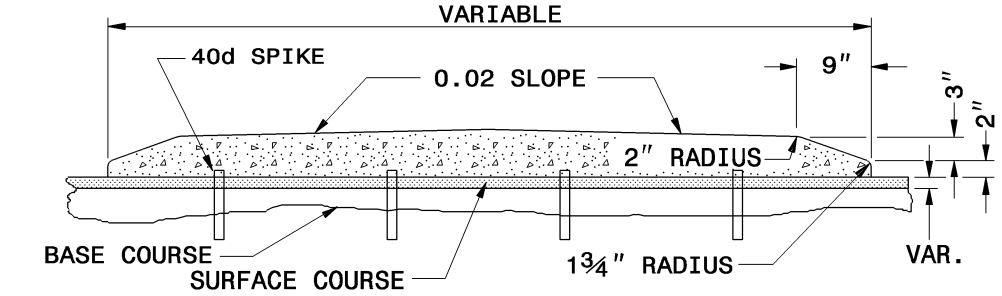


**5" MONOLITHIC CONCRETE ISLAND (SURFACE MOUNTED)
ON ASPHALT CONCRETE PAVEMENT**
(USE ON ISLAND 4' WIDE OR GREATER)

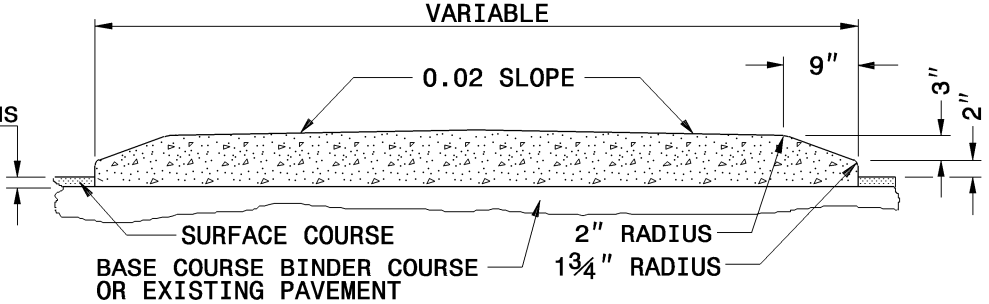

**5" MONOLITHIC CONCRETE ISLAND (KEYED IN)
ON ASPHALT CONCRETE PAVEMENT**
(USE ON ISLAND LESS THAN 4' WIDE)

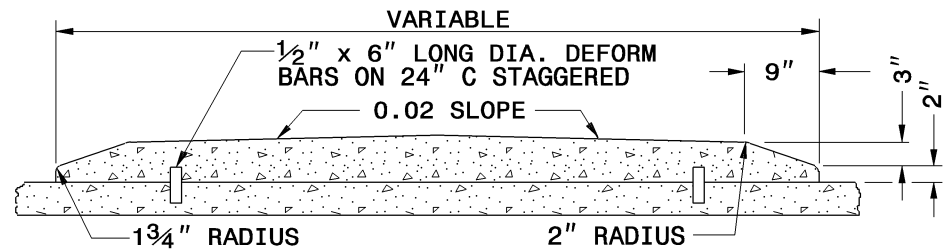

**5" MONOLITHIC CONCRETE ISLAND
(SURFACE MOUNTED) ON CONCRETE PAVEMENT**

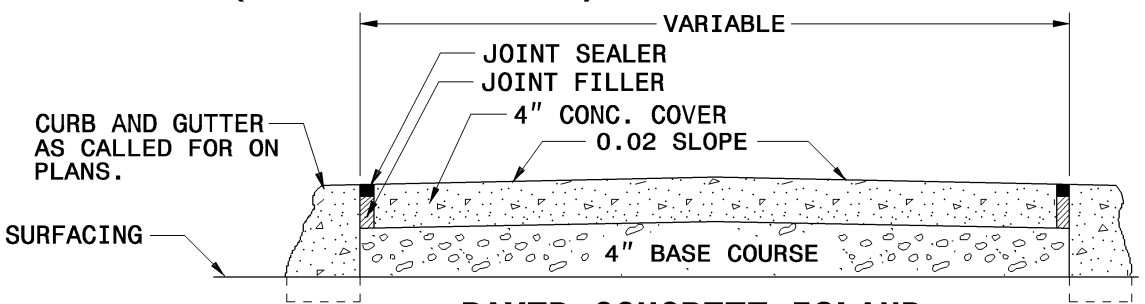

PAVED CONCRETE ISLAND